


- |  |   |
|--|---|
| 143-5000 Finish(PC) <input type="checkbox"/> | G143-5000 Finish(PC) <input type="checkbox"/> |
| 143-5002 Finish(PC) <input type="checkbox"/> | G143-5002 Finish(PC) <input type="checkbox"/> |
| 143-6000 Finish(PC) <input type="checkbox"/> | G143-6000 Finish(PC) <input type="checkbox"/> |
| 143-6002 Finish(PC) <input type="checkbox"/> | G143-6002 Finish(PC) <input type="checkbox"/> |
| 143-6005 Finish(PC) <input type="checkbox"/> | G143-6005 Finish(PC) <input type="checkbox"/> |

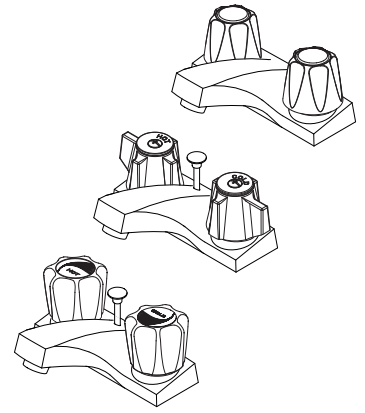

## Specifications

- Two-Handle
- 3-Hole Installation
- Washerless Valves

### Features

- 1.5 GPM Flow Rate
- Acrylic Handles (5002 & 6002 Only)
- Blade Handles (6005 Only)
- Metal Handles (5000 & 6002 Only)
- No Pop-Up Drain (500\* Only)
- Metal Pop-Up Drain (600\* Only)
- Includes Cap For Pop-Up Hole (500\* Only)
- Chain Loop Hole
- Washerless Valves
- Pforever Warranty®

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead) (G-143 Only)
- Cal Green Compliant (G-143 Only)
- EPA Watersense Certification 1.5 gpm, 5.7L/Min (G-143 Only)
- ADA Compliant-ANSI A117.1 (Lever handles only) (6005 Only)



## Dimensions

